


# Introducing Magelis Easy GXU

Reliable and cost-effective HMI solutions  
for your small automation systems




A product from the Easy line.  
Essential automation & control products.

*When just enough is just right!*

**Schneider**  
Electric™

# Magelis Easy GXU HMI

The range of Magelis™ Easy GXU touch-screen terminals consists of 2 models with 2 sizes of color TFT screen: Magelis Easy GXU Basic and Universal

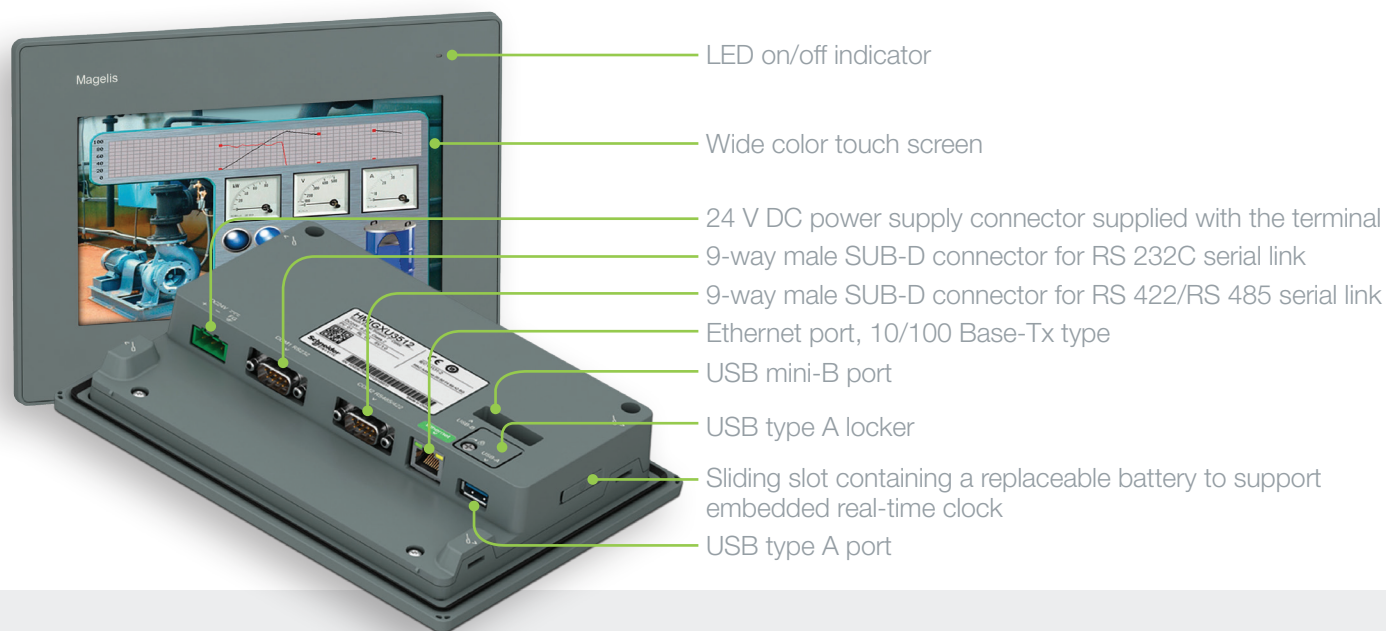

## Selection Guide

FEATURES	Magelis Easy GXU Basic		Magelis Easy GXU Universal	
	HMIGXU3500	HMIGXU5500	HMIGXU3512	HMIGXU5512
Screen size	7" wide	10.1" wide	7" wide	10.1" wide
Screen color & specification	65536 color TFT, WVGA 800 x 480 pixels			
User application memory	32 MB		48 MB	
DDR memory	128 MB		128 MB	
USB for downloading	Mini-USB x1			
USB for extension	None		USB type A x 1	
Serial COM1	RS422/485		RS232C	
Serial COM2	None		RS422/485	
Ethernet	None		10/100 Base-Tx	
RTC	support (with replaceable battery)			
Operation temperature	From 0 °C to +50 °C			
Storage temperature	From -20 °C to +60 °C			
Protection level	IP65f			
Standards	CE, RoHS			
Harsh environment	PCBA conform coating			
Installation cut-out (mm)	190 x 135	255 x 185	190 x 135	255 x 185



### Vijeo Designer Basic software

Develop your applications fast and efficiently

### Fit for purpose:

- > TFT color screens
- > USB connection
- > Ethernet port
- > Compact design

### Robustness:

- > Embedded isolated power supply
- > PCBA coating to resist to high humidity and polluted environments

### Easiness:

- > Anti-drop hooks
- > Screw installation fasteners for one-handed installation
- > Intuitive programming software Vijeo Designer Basic
- > Sliding battery socket for maintenance

### Availability

- > Extensive distribution network